

GLAZED PORCELAIN

# CONCRETE CONNECTION™



 **daltile**®  
DESIGN WITH CONFIDENCE™



# CONCRETE CONNECTION™

GLAZED PORCELAIN

*floor • wall • countertop*

## *Field Tile*



BOULEVARD BEIGE CN90



STEEL STRUCTURE CN91



CITY ELM CN92



PLAZA ROUGE CN93



EASTSIDE BROWN CN94



DOWNTOWN BLACK CN95

Photo features Concrete Connection in Steel Structure 6-1/2 x 20 field tile on floor. Backsplash features Concrete Connection Steel Structure 2 x 6 Interlocking Border, Maracas Glass 1 x 1 in Raffia Gold and Massalia 2 x 2 Floral Accent with 1 x 6 Bead Accent in Pewter



# CONCRETE CONNECTION™

GLAZED PORCELAIN

## *Decorative Accents*



BOULEVARD BEIGE CN90  
2 x 6 Interlocking Border Tile  
(Available in all colors)




RETRO WARM CN96  
2-1/2 x 13 Decorative Accent  
Coordinates with Boulevard Beige, Plaza Rouge  
& Eastside Brown.




RETRO COOL CN97  
2-1/2 x 13 Decorative Accent  
Coordinates with Steel Structure, City Elm & Downtown Black.

## *Backsplash Design Ideas*

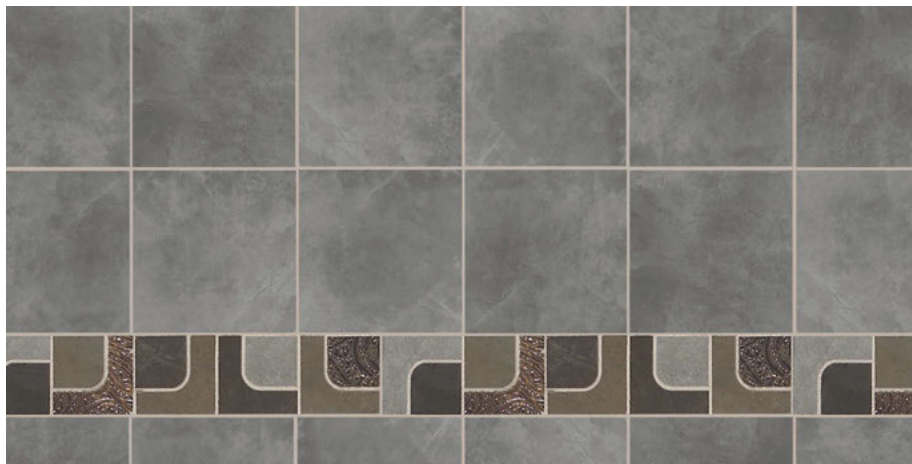

Backsplash features Steel Structure 6-1/2 x 6-1/2 field tile with coordinating Retro Cool decorative accent.


## *Pattern Ideas*




BRICK



MODULAR



HERRINGBONE



CORRIDOR



## SIZES

		SQ.FT. CARTON	PCS. PER CARTON
20 x 20 Field Tile	(19-1/2" x 19-1/2") (49.36 cm x 49.36 cm)	16.27	6
13 x 20 Field Tile	(13" x 19-1/2") (32.8 cm x 49.36 cm)	15.85	9
13 x 13 Field Tile	(13" x 13") (32.8 cm x 32.8 cm)	14.07	12
6-1/2 x 20 Field Tile	(6-1/2" x 19-1/2") (16.24 cm x 49.36 cm)	10.50	12
6-1/2 x 6-1/2 Field Tile	(6-1/2" x 6-1/2") (16.24 cm x 16.24 cm)	13.88	48
2 x 6 Interlocking Border	(Sheet 13" x 19-1/2") (Sheet 32.9 cm x 49.5 cm)	8.80	5
2-1/2 x 13 Decorative Corner	(2-1/2" x 13") (6.4 cm x 33.0 cm)	--	12

## LINEAR OPTIONS SIZE

		SQ.FT. CARTON	PCS. PER CARTON
3-1/4 x 20 Field Tile	(3-1/4" x 19-1/2") (7.96 cm x 33.0 cm)	4.16	10

Additional linear and rectangular sizes available through Linear Options™ – Daltille's linear cutting service. Visit [www.daltile.com/lineartoptions](http://www.daltile.com/lineartoptions) for sizes and order information.

## RESIDENTIAL USAGE

FLOORS	WALLS	COUNTERTOPS	EXTERIOR PATIOS	EXTERIOR POOL DECKS
F	W	C	EP	<del>ED</del>

## COMMERCIAL USAGE

	INTERIOR			EXTERIOR	
	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL	RESIDENTIAL	COMMERCIAL
Floors/Patios	✓	✓	✓	✓	
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking					
Pool Linings	✓	✓	✓	✓	✓

Suitable for exteriors in freezing and non-freezing climates when proper installation methods are followed.

## NOTES

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.




For additional information, refer to "Factors to Consider" at <http://daltile.com/factors-to-consider.cfm>.

Since there is shade variation in all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Special consideration needs to be given when installing tiles 20" and larger. Please refer to [www.daltile.com/LargeTiles](http://www.daltile.com/LargeTiles) for more information.


Use of a latex modified thin-set is recommended for installation.

## TRIM

	TYPE	NUMBER	SIZE	PCS. PER CARTON
	Bullnose	S-43E9	3 x 13	30
	Cove Base	S-36E9T (Ceramic)	6 x 13	30
	Cove Base Corner	SC-36E9T (Ceramic)	1 x 6	15

\* Cove Base trim is intended to coordinate with floor field tile in the standard 90-degree installation position.

## SHADE VARIATION



## INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION
3/8" (11/32" for Decorative Border)	1/8" (3/16" when rectangular sizes are used in a staggered brick-joint pattern, where the overlap does not exceed 33%)

## DYNAMIC C.O.F. (WET) : 2

The higher the rating, the higher the slip resistance.

1 < .42

2 ≥ .42

## STATIC C.O.F. (WET) : 3

1 < .50

2 .50 - .59

3 ≥ .60

## TEST RESULTS

	ASTM#	RESULT
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 400 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Dynamic C.O.F.	A137.1	≥ 0.42
Static C.O.F.	CI028	Wet: ≥ 0.60 Dry: ≥ 0.75
Abrasion Resistance	CI027	3

Dynamic C.O.F. (Wet) value as measured by the DCOF AcuTest™ helps to assess a products suitability for a commercial environment. For more information, visit our website at [www.daltile.com/DCOF](http://www.daltile.com/DCOF).



# CONCRETE CONNECTION™

GLAZED PORCELAIN



*floor • wall • countertop*



**daltile**  
**greenworks™**  
ENVIRONMENTAL LEADERSHIP THAT WORKS

By their very design, Daltile products can help make it easier for you to earn LEED™ points and/or points towards many industry leading green home building programs. From using recycled material content to establishing manufacturing facilities within 500 miles of your project, we help ensure you don't have to compromise your design to be environmentally conscious. For detailed information, visit [daltilegreenworks.com](http://daltilegreenworks.com).



PRE CONSUMER  
RECYCLED MATERIALS



MADE IN  
THE U.S.A.



LINEAR  
OPTIONS



TRU-EDGE



All or selected items within this series are Made in the USA. For more information visit [www.daltile.com/ConcreteConnection](http://www.daltile.com/ConcreteConnection).



**daltile®**

7834 C. F. Hawn Freeway | Dallas, TX 75217 | 214.398.1411 800.933.TILE  
For more information about Daltile products and services, visit our website at [daltile.com](http://daltile.com)