


# CS300 SPA SYSTEM SPECIFICATIONS

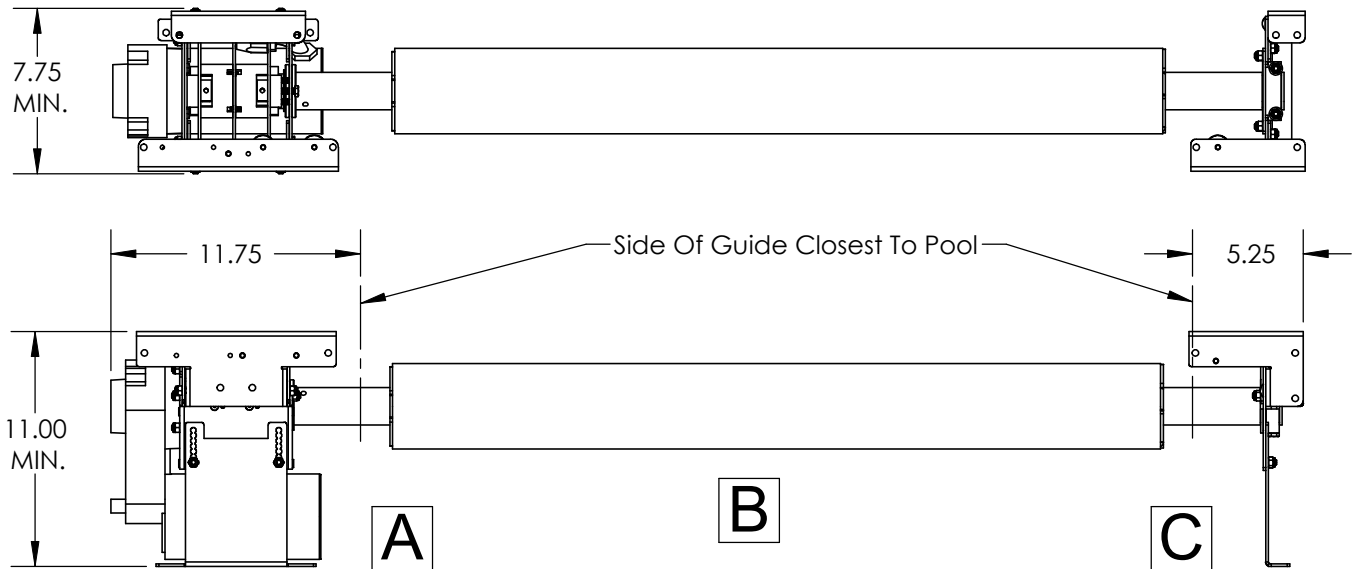

A = Mechanism

Specs: Length - 11.75 inches\* **12"**  
 Additional clearance necessary for junction box  
 Width - 7.75 inches minimum  
 10.25 inches maximum **9"**  
 Height - 11 inches minimum  
 1.38 inch height adjustment in pulley brackets  
 1.50 inch height adjustment in mounting feet  
 Rope - Maximum rope on rope reel is for 25 foot cover

B = Cover Roll-Up Tube

Specs: Diameter - 4 inches  
 Thickness of wall - .072 inch  
 Length - 3 inches less than guide-space

C = Non-Motor End

Specs: Length - 5.25 inches\*

D = Leading Edge

Specs: Diameter - 2 inches  
 Underguide Length - 6 inches less than guide-space  
 Topguide Length - 5 inches less than guide-space

Maximum Size Specifications

Width - 16 feet  
 Length - 25 feet  
 Total square footage cannot exceed 200 square feet

Preferred Box Specifications

Width - 10 inches  
 Depth - 12 inches

Electrical Power Requirements - 120 Volts AC, 10 amp GFCI breaker

\* All length dimensions are from the side of the guide closest to the pool.

