


# RIMINI

## ALL TILED SPA - Fits 4 Adults

SPECIFICATIONS	
SHELL WEIGHT:	1900 LBS.
WATER WEIGHT:	4680 LBS.
TOTAL SHELL & WATER WEIGHT:	6580.2 LBS.
WATER VOLUME:	95 Cu.Ft.
MAX WATER GAL:	711 GAL.
SURFACE AREA:	42.6 SQ. FT.
IAPMO#:	1138
FDA#:	2030305

**SKID SUPPORT STRUCTURE\* BONDED TO SPA**




\*SKIDS SUPPLIED BY NESPA


**LIGHT NICHE**

 SPA BRIGHT, 120 V, 100 WATT, 50' CORD, U.L. APPROVED


**MAIN DRAIN**

 6" Round Hockey Puck  
 Aquapro 6HPHxxx  
 Sumpless Suction Outlet  
 Floor/Wall 224 GPM @ 6.3fps  
 Complies w/ ANSI Code  
 ASME A112.19.8-2007 & VGB 2008


**SIDEWALL SUCTION**

 6" Round Hockey Puck  
 Aquapro 6HPHxxx  
 Sumpless Suction Outlet  
 Floor/Wall 224 GPM @ 6.3fps  
 Complies w/ ANSI Code  
 ASME A112.19.8-2007 & VGB 2008


**SKIMMER**

 HAYWARD SP-1084FVE  
 SURFACE SKIMMER  
 W/ EQUALIZER,  
 NSF APPROVED

**JET**


 **HYDRO INLETS**  
 1-1/2" WATER - 1-1/2" AIR  
 HYDROAIR #10-5100  
 COMPLIES W/ ANSI CODE ASME A112.19.8-07  
 UL APPROVED

**RETURN**

 **INLET FITTINGS**  
 1-1/2" WALL TYPE W/ EYEBALL  
 HYDROAIR #10-3500  
 COMPLIES W/ ANSI CODE ASME A112.19.8-07  
 UL APPROVED


**FILL**

 **INLET FITTINGS**  
 1-1/2" WALL TYPE W/ EYEBALL  
 HYDROAIR #10-3500  
 COMPLIES W/ ANSI CODE ASME A112.19.8-07  
 UL APPROVED

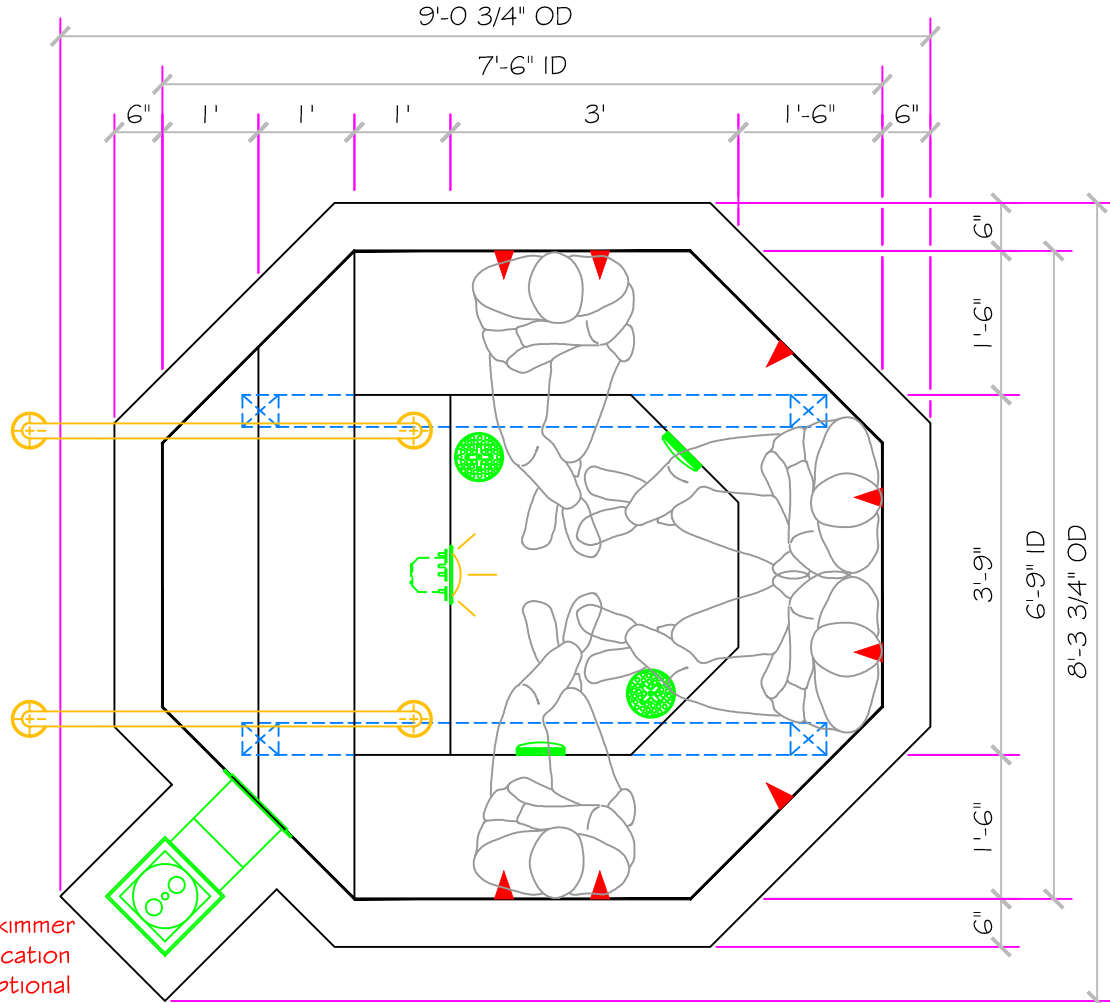

\*Skimmer Location Optional

Approved for Commercial use  
 Complies with VGB Pool & Spa Safety Act

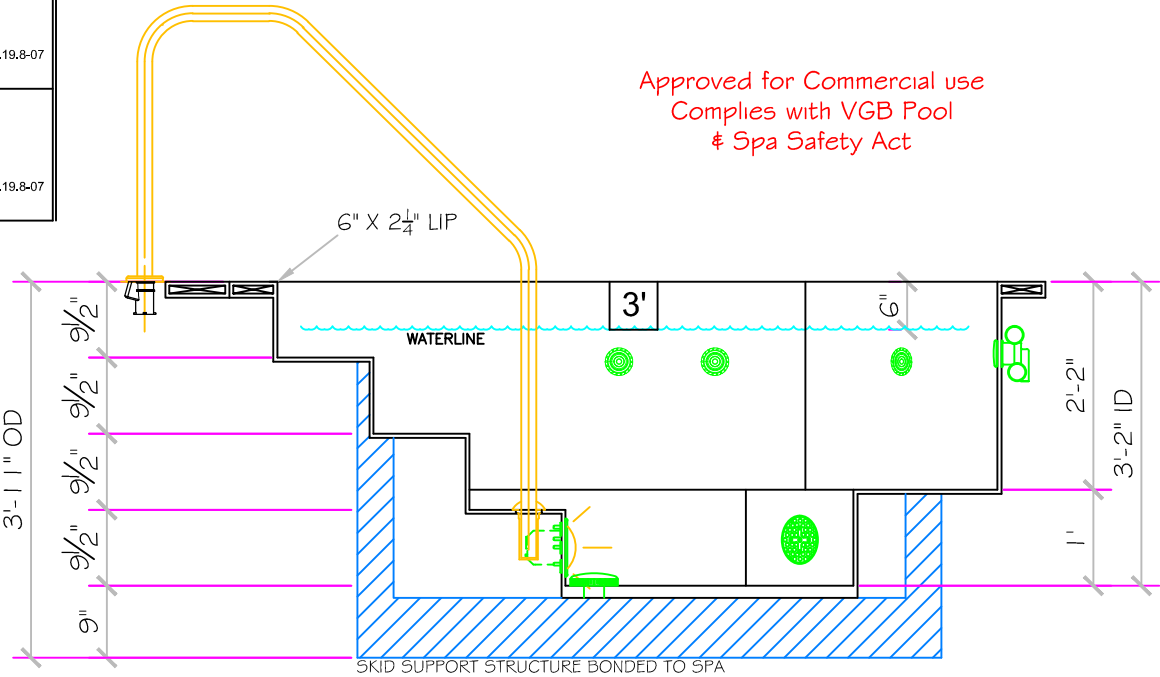

All drawing dimensions supplied by NESPA ENTERPRISES INC. are for reference only. All CAD files were created using AutoCAD file (\*.dwg.) and were provided as a service to our customers using AutoCAD. Errors sometimes occur during this process and with software incompatibility upon opening a file. NESPA ENTERPRISES INC. and/or any authorized distributor of our products will not be held responsible for problems arising from files which have been converted and does not warrant the documents against deficiencies or typographical errors of any kind. We recommend that all measurements are verified with actual physical product before any custom fabrication in the field.