



2" x 2" Field Tile
(1-15/16" x 1-15/16" x 1/4")
(4.9 cm x 4.9 cm)

1' x 2' sheets per carton: 12
Square feet per carton: 24



1" x 1" Field Tile
(15/16" x 15/16" x 1/4")
(2.4 cm x 2.4 cm)

1' x 2' sheets per carton: 12
Square feet per carton: 24



1" Hex
(Nominal 15/16" x 1/4")
(Nominal 2.5 cm)

Sheets per carton: 12
Square feet per sheet: 1.75



3" x 3" Field Tile
▼ Select colors available
See Keystones™ Select, page 66

Grout joint recommendation: 1/16" approximately

keystones™

Price Group 1



White D317 ▼ a/b/c/d
White Granite D037 ▼ d
Innocent Blush™ D163 a/b
Canvas D137
Buffstone Range D156 ▼ a/b
Mottled Med. Brown D050 a/b
Silver Sage D140
Light Gray D014 a/b/d
Dark Gray D026 ▼ a

Price Group 2



Gold Dust D138 b
Pumice D336 ▼ c/d
Marble D325 ▼ c/d/e
Dapple Gray D326 ▼ c/e
Porcelain D335 ▼ a/d
Almond D035
Fawn D136 ▼
Cornsilk D160
Honey D440 b



Mexican Sand™ D174 ▼
Mexican Sand™ Speckle D175 ▼
Mocha D036 a
Corallin D008
Brownstone Range D156
Cypress D452 ▼
Dark Green D012 a/b
Royal Rose D383 c/e

Price Group 3



Butterscotch D343
Bombay D178 ▼
Cobalt Blue D023 a/b
Sea Speck D372 c/e
Cotto Speckle D179 ▼
Cinnamon Range D007 a/b
Ebony D311 ▼ a/b

Price Group 4



Dorado D181 ▼ b
Terra Rosata D042 b
Bayberry D043 b
Juniper D322 ▼ b
Galaxy D469 ▼ b
Deep Purple D044 b
Galaxy Speckle D470 ▼ c/e

Price Group 5



Red D017
(Does not have trim)

Shade Variation: (Low) to (High)

Size, Trim and Surface Reference:

- a. 1" x 1" and 2" x 2" size available with abrasive content. Abrasive trim only available in S-886 and SC-886.
- b. Available in 1" Hexagon.
- c. Color also available in a 2" x 2" clearglazed finish as part of the Spectrastone series.
- d. Available in tread finish.
- e. Color not available in a 1" x 1" size.

In a wide variety of colors ranging from earth tones to brights, Keystones ceramic mosaics borrow nature's beauty as well as its strength. Keystones are frostproof and will resist weathering, staining and fading, and are virtually waterproof. Inorganic stains are precisely blended with porcelain raw materials and kiln-fired to create Keystones' distinctive look.

Application

	Residential	Light Commercial	Commercial
Floors	X	X	X
Walls	X	X	X
Counters	X	X	X
Pool Linings or Pool Decking	X	X	X

Also recommended for exterior walls and floors in any climate, as well as swimming pool linings and decking where proper installation methods are followed.

Trim See page 74 for trim information.

Test Results 

	ASTM#	Result
Water Absorption	C373	<0.5%
Breaking Strength	C648	>300 lbs
Chemical Resistance	C650	Resistant
Bond Strength	C482	>65 psi
Coefficient of Friction (non-abrasive)	C1028	Wet: ≥0.60
		Dry: ≥0.70
Coefficient of Friction (abrasive)	C1028	Wet: ≥0.70
		Dry: ≥0.80
Abrasion Resistance	ISO 10545-7	4

Abrasion Resistance Application Classifications:

- 1** = Light Residential **2** = Heavy Residential
- 3** = Light Commercial **4** = Heavy Commercial

For use on ramps when ordered with abrasive content.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. See "Factors to Consider" and "Important Product Warranty Information" on page 91.

Mounting Standard mounting method is on 1' x 2' dot-mounted sheets, other mounting methods available. See your Daltile representative for information.

Notes Keystones are grouped by price. No. (1) is the least expensive. (S) is premium priced.



Westerville Community Center, Westerville, OH.
 Architect: John Poe Architects.
 Tile Contractor: Weiffenbach Tile and Marble
 Daltile Architectural Representative: Marsha McCauley.
 1" x 1" Keystones mural.



Westerville Community Center, Westerville, OH.
 Architect: John Poe Architects.
 Tile Contractor: Weiffenbach Tile and Marble
 Daltile Architectural Representative: Marsha McCauley.
 Keystones 2" x 2" White and Cobalt with Semi-gloss White and Cobalt.



3" x 3" Field Tile
 (2-7/8" x 2-7/8" x 1/4")
 (4.9 cm x 4.9 cm)
 1' x 2' sheets per carton: 12
 Square feet per carton: 24

Grout joint recommendation: approximately 1/16"

keystones™ select

Unglazed and Clearglazed



White
D317 (1)



White Granite
D037 (1)



Buffstone Range
D147 (1)



Light Gray
D176 (1)



Dark Gray
D026 (1)



Fawn
D136 (1)



Vanillin
D131 (1)



Cypress
D452 (1)



Porcelain
D335 (2)



Marble
D325 (2)



Dapple Gray
D326 (2)



Pumice
D336 (2)



Mexican Sand™
D174 (2)



Mexican Sand™
Speckle D175 (2)



Bombay
D178 (2)



Ebony
D311 (3)



Juniper
D322 (3)



Galaxy
D469 (3)



Galaxy Speckle
D470 (3)



Dorado
D181 (3)




Cotto Speckle
D179 (3)



Wild Rose™
D188 (3)

Shade Variation: (Medium)

Photo features Keystones Select in Cypress, Mexican Sand and White with Keystones in 1" x 1" White. Wall features Semi-gloss in 6" x 6" White.

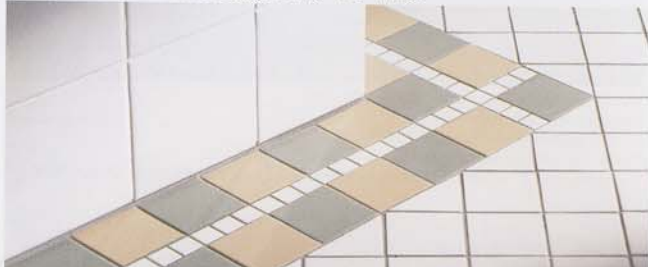

A rainbow of colors and styles makes Keystones Select the choice when you want to achieve perfect coordination between walls, floors and counters. This line of 3" x 3" porcelain unglazed and clearglazed tile allows for great versatility in design and provides for joint alignment when coordinated with Daltile's Semi-gloss, Matte, or Rittenhouse Square products in 6" x 6" or 3" x 6" wall tile.

Applications

	Residential	Light Commercial	Commercial
Floors	X	X	X
Walls	X+	X+	X+
Counters	X+	X	X
Backsplashes	X+	X+	X+

+Clearglazed recommended for these applications only.
 Unglazed recommended for exterior walls and floors in any climate, as well as swimming pool linings and decking.

Trim See below for available trim.

Test Results

	ASTM#	Result
Water Absorption	C373	<0.5%
Breaking Strength	C648	>304 lbs
Bond Strength	C482	>65
Chemical Resistance	C650	Resistant
Coefficient of Friction (unglazed)	C1028	Wet: ≥0.60
		Dry: ≥0.80

Unglazed product complies with A.D.A. recommendations for accessible routes.

Standing water and other contaminants create slippery conditions for any hard surface floor material. To avoid injuries, floor applications with exposure to these conditions require extra caution in product selection and proper maintenance.

Please see important product and warranty information on page 91.

Mounting Standard mounting method is on 1' x 2' dot-mounted sheets, which provides an excellent bonding surface for faster installation.

Trim

Type	Number	Size
	S-4339	3" x 3"
	SN-4339	3" x 3"
	Cove/Inside Finger Cove Corner	
	C-103	1" x 3"
	CC-103	1" x 3"

Built-up Base

	2 Rows, 3" x 3"
	1 Row, C-103

Photo features Keystones Select in Cypress, Mexican Sand and White with Keystones in 1" x 1" White. Wall features Semi-gloss in 6" x 6" White.

