



STONE LOOK

FLOOR

CONTINENTAL SLATE™

COLORBODY™ PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC



 **daltile**®
IMAGINE WHAT'S POSSIBLE™

FLOOR

CONTINENTAL SLATE™

COLORBODY™ PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC

Get Inspired by the Natural Beauty of Slate

The intriguing colors and cleft surface of Continental Slate™ are a near perfect recreation of natural slate. Its inspired tones have a high degree of shade variation, so they complement practically any décor.

• EARTHY INSPIRATION

- Design mimics the natural tones, shading and clefting of slate
- Durable option to natural slate

• NATURAL DESIGN OPTIONS

- Offered in modular sizes
- Available with coordinating mosaic and decorative accents

STONE
LOOK

USAGE



SPECIAL FEATURES

Cover photo features Continental Slate™ Egyptian Beige 3 x 3 mosaic and Tuscan Blue 12 x 12 in a grid pattern on the floor.
Above photo features Continental Slate™ Tuscan Blue 12 x 12 in a grid pattern on the floor.

SEE CHARTS FOR FULL PRODUCT DETAILS

CONTINENTAL SLATE™


COLORBODY™ PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC

SIZES:



FINISHES: MATTE

COLORBODY™ PORCELAIN FLOOR TILE

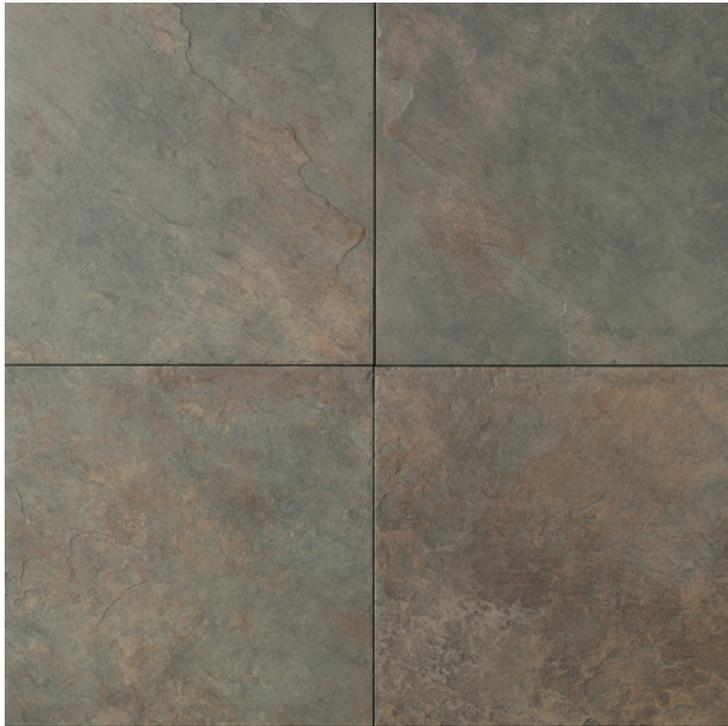

BRAZILIAN GREEN CS52



PERSIAN GOLD CS54



EGYPTIAN BEIGE CS50



INDIAN RED CS51



TUSCAN BLUE CS56



MOROCCAN BROWN CS55



ENGLISH GREY CS57



ASIAN BLACK CS53

3 x 3 GLAZED CERAMIC MOSAIC



PERSIAN GOLD CS54

EGYPTIAN BEIGE CS50

BRAZILIAN GREEN CS52

TUSCAN BLUE CS56

MOROCCAN BROWN CS55

INDIAN RED CS51

ENGLISH GREY CS57

ASIAN BLACK CS53

DECORATIVE BORDER



CS70 4 x 12 DECORATIVE BORDER
Egyptian Beige/Indian Red/
Brazilian Green/Asian Black

CS71 4 x 12 DECORATIVE BORDER
Egyptian Beige/Indian Red/
Brazilian Green/Asian Black

CS74 4 x 12 DECORATIVE BORDER
Persian Gold/Tuscan Blue/
Moroccan Brown

CS75 4 x 12 DECORATIVE BORDER
Persian Gold/Tuscan Blue/
English Grey

CS72 4 x 12 DECORATIVE BORDER
Egyptian Beige/Brazilian Green/
Asian Black



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT™
*Not Applicable to Mesh-Mounted Mosaics



CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

CONTINENTAL SLATE™

COLORBODY™ PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC

STONE LOOK

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	18 x 18 Floor Tile	(17-3/4" x 17-3/4") (45.20 cm x 45.20 cm)	5/16"	18.00	8
	12 x 12 Floor Tile	(11-13/16" x 11-13/16") (30.00 cm x 30.00 cm)	5/16"	15.00	15
	6 x 6 Floor Tile	(5-13/16" x 5-13/16") (14.70 cm x 14.70 cm)	5/16"	11.00	44
	4 x 12 Decorative Border	(4" x 11-13/16") (10.00 cm x 30.00 cm)	5/16"	N/A	10
	3 x 3 Mosaic (Dot-mounted)	(12" x 24" Sheet) (30.00 cm x 60.00 cm)	1/4"	24.00	12

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓*
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES :

Floor tile suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

Mosaic suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

* Mosaic tile only

** 6 x 6 floor and mosaic tile only



All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.

TRIM

	Type	Number	Size	Pieces/ Carton
	Bullnose	S-43C9	3 x 12	30
	Cove Base	S-36C9T	6 x 12	22
	Cove Base Outcorner	SC-36C9T	1 x 6	15

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

Cove base and cove corner trim are suitable for non-freezing climates only.

INSTALLATION

Grout Joint Recommendation	Shade Variation
----------------------------	-----------------

Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern. When multiple sizes are installed in a modular pattern, please specify same size caliber at time of order.)



Mosaic: 1/8" Approximately

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Mosaic Result
Water Absorption	C373	< 0.5%	< 3.0%
Breaking Strength	C648	> 275 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltille.com/Factors.

Random visuals enhance the natural beauty of this product.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltille.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltille® products and information, visit our website at daltille.com.

