

11' MIRAGE

ALL TILED SPA - Fits 7 Adults

SPECIFICATIONS	
DRY WEIGHT:	2650 LBS.
TOTAL WEIGHT:	14062 LBS.
WATER:	1369 GAL.
VOLUME:	183 Cu.Ft.
WEIGHT:	11412 LBS.
SURFACE AREA:	73 SQ. FT.
IAPMO#:	1138
FDA#:	2030305

SKID SUPPORT STRUCTURE* BONDED TO SPA

*SKIDS SUPPLIED BY NESPA

LIGHT NICHE

SPA BRIGHT, 120 V, 100 WATT, 50' CORD, U.L. APPROVED

MAIN DRAIN

AquaStar 32CDFLFR, 32" Channel Drain, Approved Max Flow Rate: Floor = 236 GPM @ 3.4 fps, Wall = 136 GPM @ 1.9 fps, V.G.B Approved Safety Drain

SIDEWALL SUCTION

AquaStar SAV, 8" Dia Frame, Approved Max Flow Rate: Floor = 88 GPM @ 3.2 fps, Wall = 70 GPM @ 2.6 fps, 8.8 Sq In - Open Area, V.G.B Approved Safety Drain

EQUALIZER

8" HIGH FLOW SUCTIONS
Waterway 640-357XV
Super Hi-Flow Suction Assy.
Max Flow 180 GPM
Complies w/ ANSI Code
ASME A112.19.8-2007 & VGB 2008

SKIMMER

HAYWARD SP-1084FVE SURFACE SKIMMER W/ EQUALIZER NSF APPROVED

JET



HYDRO INLETS
1-1/2" WATER - 1-1/2" AIR
HYDROAIR #10-5700
COMPLIES W/ ANSI CODE ASME A112.19.8-07 U.L. APPROVED

RETURN

INLET FITTINGS
1-1/2" WALL TYPE W/ EYEBALL
HYDROAIR #10-3500
COMPLIES W/ ANSI CODE ASME A112.19.8-07 U.L. APPROVED

FILL

INLET FITTINGS
1-1/2" WALL TYPE W/ EYEBALL
HYDROAIR #10-3500
COMPLIES W/ ANSI CODE ASME A112.19.8-07 U.L. APPROVED

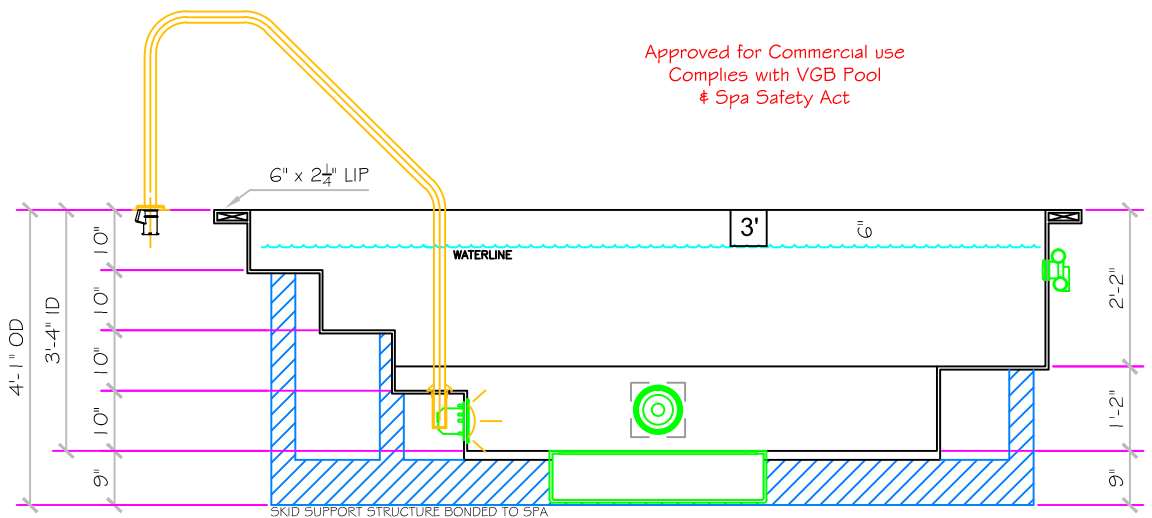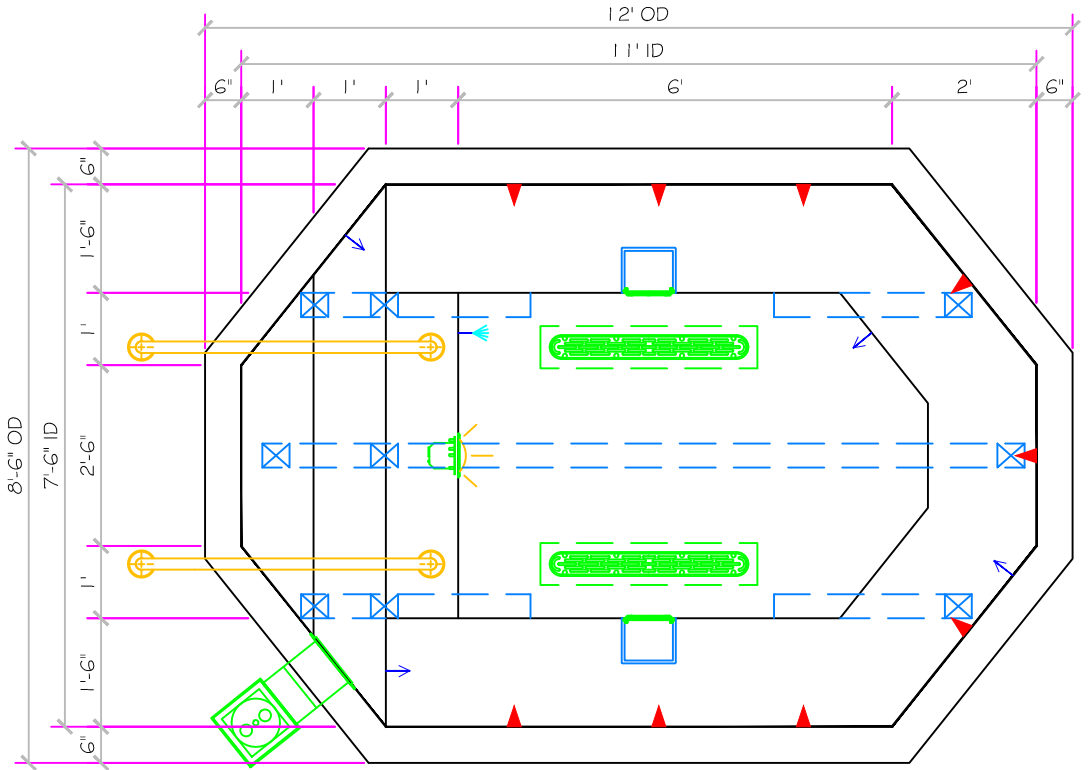

Approved for Commercial use
Complies with VGB Pool
& Spa Safety Act