

13' MIRAGE

ALL TILED SPA - Fits 8 Adults

SPECIFICATIONS	
DRY WEIGHT	2900 LBS.
TOTAL WEIGHT	16994 LBS.
WATER	1690.5 GAL.
VOLUME	226 Cu.Ft.
WEIGHT	14094 LBS.
SURFACE AREA	87.5 SQ. FT.
IAPMO#	1138
FDA#	2030305

SKID SUPPORT STRUCTURE* BONDED TO SPA



*SKIDS SUPPLIED BY NESPA

LIGHT NICHE



SPA BRIGHT, 120 V, 100 WATT, 50' COORD. U.L. APPROVED

MAIN DRAIN



AquaStar 32CDFLR, 32" Channel Drain, Approved Max Flow Rate: Floor = 236 GPM @ 3.4 fps Wall = 136 GPM @ 1.9 fps V.G.B Approved Safety Drain

SIDEWALL SUCTION



AquaStar 8AV, 8" Dia Frame, Approved Max Flow Rate: Floor = 88 GPM @ 3.2 fps Wall = 70 GPM @ 2.6 fps 8.8 Sq In - Open Area V.G.B Approved Safety Drain

EQUALIZER



8" HIGH FLOW SUCTIONS Waterway 640-567V Super Hi-Flow Suction Assy, Max Flow 180 GPM Complies w/ ANSI Code ASME A112.19.8-2007 & VGB 2008

SKIMMER



HAYWARD SP-1084FVE SURFACE SKIMMER W/ EQUALIZER, NSF APPROVED

JET



HYDRO INLETS 1-1/2" WATER - 1-1/2" AIR HYDROAIR #10-5100 COMPLIES W/ ANSI CODE ASME A112.19.8-07 U.L. APPROVED

RETURN




INLET FITTINGS 1-1/2" WALL TYPE W/ EYEBALL HYDROAIR #10-3500 COMPLIES W/ ANSI CODE ASME A112.19.8-07 U.L. APPROVED

FILL



INLET FITTINGS 1-1/2" WALL TYPE W/ EYEBALL HYDROAIR #10-3500 COMPLIES W/ ANSI CODE ASME A112.19.8-07 U.L. APPROVED

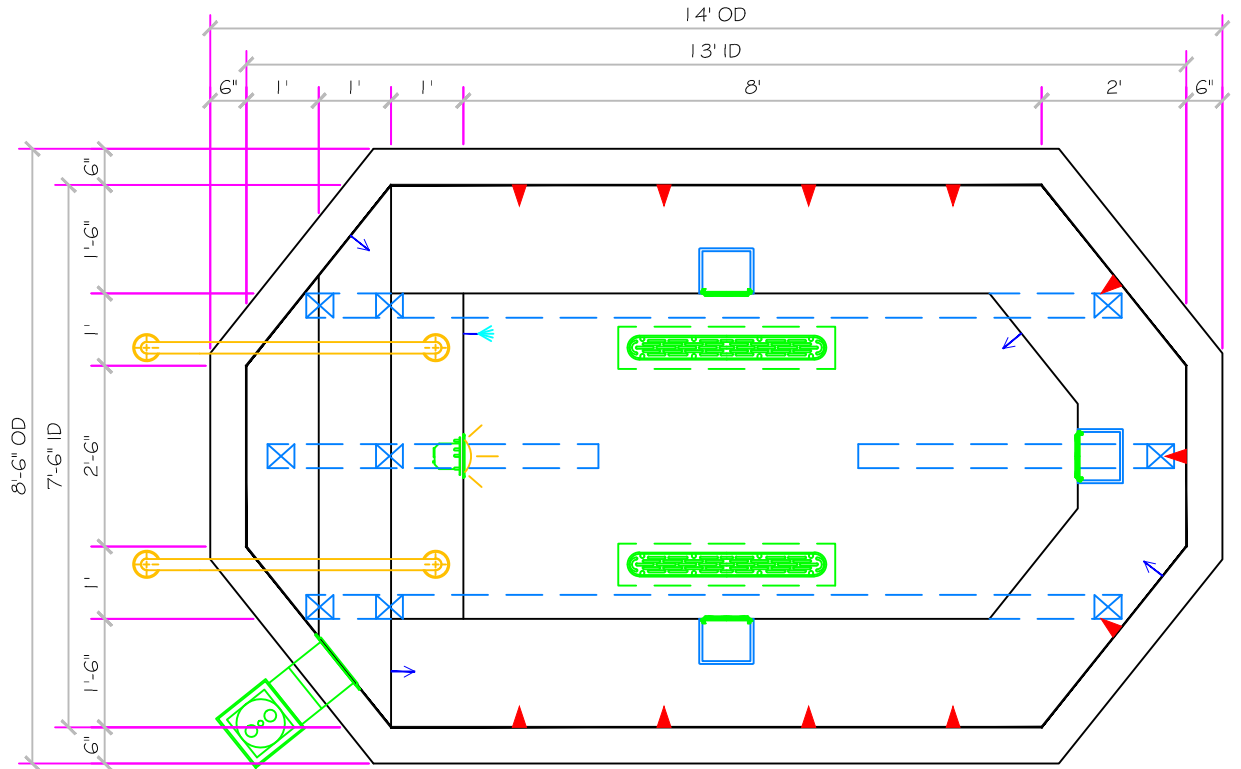

Approved for Commercial use
Complies with VGB Pool
& Spa Safety Act

