


# 18' RENAISSANCE (SWIM SPA) ALL TILED SPA - Fits 12 Adults

SPECIFICATIONS	
DRY WEIGHT:	3350 LBS.
TOTAL WEIGHT:	23617 LBS.
WATER:	2431 GAL.
VOLUME:	325 Cu.Ft.
WEIGHT:	20267 LBS.
SURFACE AREA:	121 SQ. FT.
IAPMO#:	1138
FDA#:	2030305


**SKID SUPPORT STRUCTURE BONDED TO SPA**

 SKIDS SUPPLIED BY NESPA

**LIGHT NICHE**

 SPA BRIGHT, 120 V, 100 WATT, 50° COND., UL APPROVED


**MAIN DRAIN**

 AquaStar 32CDLFR, 32" Channel Drain, Approved Max Flow Rate: Floor = 238 GPM @ 3.2 fps, Wall = 158 GPM @ 1.8 fps, V.G.B. Approved Safety Drain

**SIDEWALL SUCTION**

 AquaStar 8AV, 8" Dia Frame, Approved Max Flow Rate: Floor = 88 GPM @ 3.2 fps, Wall = 70 GPM @ 2.8 fps, 8.8 Sq Ft - Open Area, V.G.B. Approved Safety Drain


**EQUALIZER**

 4" HIGH FLOW SUCTIONS, Waterway #40-3571/V, Square Inlets Surface Assy, Max Flow 180 GPM, Complies w ANSI Code ASME A12.19.8-2007 & VGB 2008


**SKIMMER**

 Hayward SR-108FIVE SURFACE SKIMMER, W/ EQUALIZER, NSF APPROVED

**JET**



 HYDRO INLETS, 102" WATERLINE, 1-1/2" AIR, HYDROAR #10-510, COMPLES W/ ANSI CODE ASME A12.19.8-07, UL APPROVED

**RETURN**

 INLET FITTINGS, 1-1/2" WALL TYPE W/ EYEBALL, HYDROAR #10-350, COMPLES W/ ANSI CODE ASME A12.19.8-07, UL APPROVED

**FILL**

 INLET FITTINGS, 1-1/2" WALL TYPE W/ EYEBALL, HYDROAR #10-350, COMPLES W/ ANSI CODE ASME A12.19.8-07, UL APPROVED

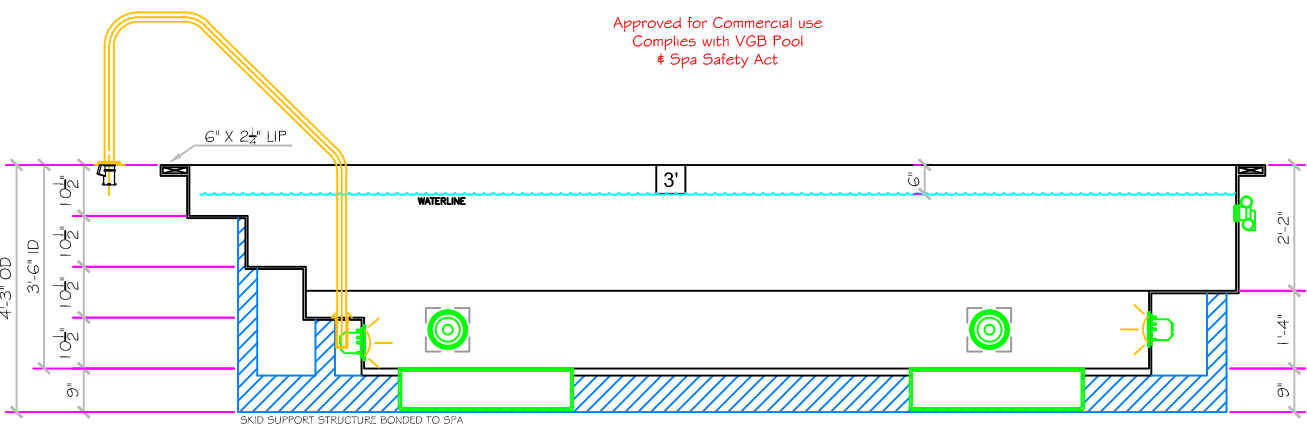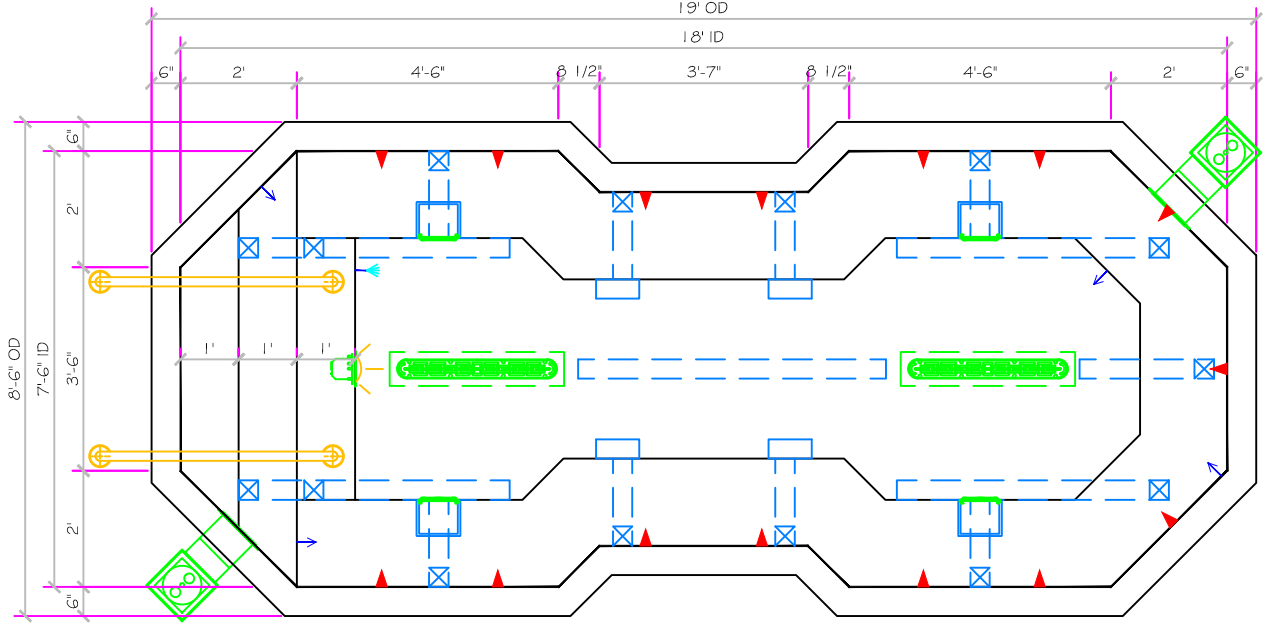

Approved for Commercial use  
Complies with VGB Pool  
\* Spa Safety Act

SKID SUPPORT STRUCTURE BONDED TO SPA